

SIREN




sconce



SIREN

SCNCE

type

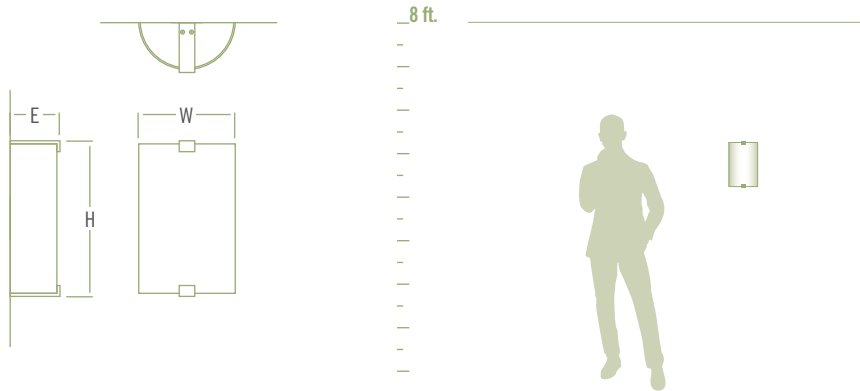

2-575-124 (incandescent)

finish	diffuser	lamping	dimensions	options	sample catalog #
24 - satin nickel	1 - white opal glass	2 x 60W B incandescent (candelabra)	7.75"(w) x 12.63"(h) x 4"(ext)		2-575-124

2-5153-XXX (fluorescent)

finish	diffuser	lamping	dimensions	options	sample catalog #
14 - polished chrome	1 - white opal glass	1 x 26W quad 4-pin fluorescent (G24q-3)	7.75"(w) x 12.63"(h) x 4"(ext)		2-5153-114 (shown)
24 - satin nickel	2 - matte white acrylic				
	3 - tobacco acrylic				
	4 - faux onyx acrylic				
	6 - silver cloth acrylic				
	7 - wave pattern acrylic				
	8 - leaf acrylic				

general specifications:

- ▲ Cast steel trim.
- ▲ Cold rolled steel housing.
- ▲ Fluorescent fixtures have white acrylic top and bottom lenses.
- ▲ Incandescent fixtures have perforated steel top and bottom lenses.
- ▲ Acrylic diffusers are 1/8" thick, finish as specified.
- ▲ Glass diffusers are 1/4" thick white opal duplex glass.
- ▲ U.L. and C.U.L. approved for damp locations.
- ▲ For installation in Canada, please specify.
- ▲ Fluorescent ballast is electronic HPF, rapid start, universal voltage (120V to 277V).
- ▲ All units mount to standard 4" octagonal junction box.
- ▲ Visit www.oxygenlighting.com for technical cut sheets.
- ▲ Oxygen lighting reserves the right to modify designs at any time.